

Eurocell Panels

Vertical Polarization

Half-power Beam Width

860–960

V


65°

KATHREIN


Antennen · Electronic

VPol Panel 860–960 65° 9dBi

Type No.	730 676	730 677
Frequency range	860 – 960 MHz	
Polarization	Vertical	
Gain	9 dBi	
Half-power beam width	H-plane: 65° E-plane: 70°	
Front-to-back ratio	> 25 dB (890 – 960 MHz) > 20 dB (860 – 890 MHz)	
Impedance	50 Ω	
VSWR	< 1.3	
Intermodulation IM3 (2 x 43 dBm carrier)	< -150 dBc	
Max. power	350 W (at 50 °C ambient temperature)	

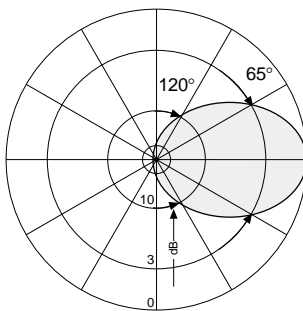

Horizontal Pattern

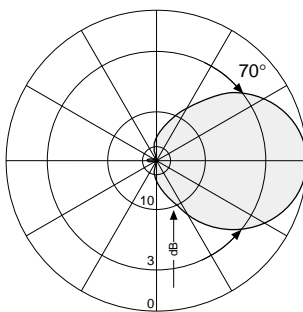

Vertical Pattern

Mechanical specifications	730 676	730 677
Input	7-16 female	N female
Connector position*	Bottom or top	
Weight	1.2 kg	
Wind load	Frontal: 40 N (at 150 km/h) Lateral: 25 N (at 150 km/h) Rearside: 90 N (at 150 km/h)	
Max. wind velocity	230 km/h	
Packing size	312 x 272 x 160 mm	
Height/width/depth	264 / 258 / 103 mm	

* Inverted mounting:
Connector position top: Change drain hole screw.

936.763/g Subject to alteration.

Eurocell Panels

The Advanced Antenna Technology

For Vertical Polarization


KATHREIN
Antennen · Electronic

Accessories (order separately)

Type No.	Description	Remarks	Weight approx.	Units per antenna
731 651	1 clamp	Mast: 28 – 64 mm diameter	330 g	1
738 546	1 clamp	Mast: 50 – 115 mm diameter	1.0 kg	1
850 10002	1 clamp	Mast: 110 – 220 mm diameter	2.7 kg	1
850 10003	1 clamp	Mast: 210 – 380 mm diameter	4.8 kg	1
733 677	1 clamp	Mast: 60 – 115 mm diameter	2.0 kg	1
733 678	1 clamp	Mast: 115 – 210 mm diameter	2.6 kg	1
733 679	1 clamp	Mast: 210 – 380 mm diameter	4.0 kg	1
733 680	1 clamp	Mast: 380 – 521 mm diameter	5.3 kg	1
732 809	1 flat surface	Wall mounting kit	200 g	1

Wall mounting: Using the flat surface attachment plate type no. 732 809.

Mast mounting: Using one clamp suitable for the mast diameter.

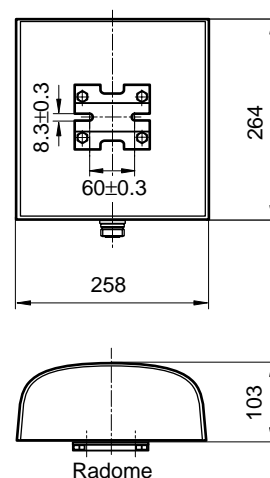

Material:

Reflector screen: Weather-proof aluminum.

Fiberglass radome: The grey fiberglass radomes of these antennas are very stable and extraordinarily stiff. They are resistant to ultraviolet radiation and can also be painted to match their surroundings.

All screws and nuts: Stainless steel.

Grounding:

The metal parts of the antenna including the mounting kit and the inner conductors are DC grounded.

Environmental conditions:

Kathrein cellular antennas are designed to operate under the environmental conditions as described in ETS 300 019-1-4 class 4.1 E.

The antennas exceed this standard with regard to the following items:

- Low temperature: –55 °C
- High temperature (dry): +60 °C

Ice protection: Due to the very sturdy antenna construction and the protection of the radiating system by the radome, the antenna remains operational even under icy conditions.

Environmental tests:

Kathrein antennas have passed environmental tests as recommended in ETS 300 019-2-4. The homogenous design of Kathrein's antenna families use identical modules and materials. Extensive tests have been performed on typical samples and modules.

Please note:

As a result of more stringent legal regulations and judgements regarding product liability, we are obliged to point out certain risks that may arise when products are used under extraordinary operating conditions.

The mechanical design is based on the environmental conditions as stipulated in ETS 300 019-1-4, which includes the static mechanical load imposed on an antenna by wind at maximum velocity. Extraordinary operating conditions, such as heavy icing or exceptional dynamic stress (e.g. strain caused by oscillating support structures), may result in the breakage of an antenna or even cause it to fall to the ground. These facts must be considered during the site planning process.

The installation team must be properly qualified and also be familiar with the relevant national safety regulations.

The details given in our data sheets have to be followed carefully when installing the antennas and accessories.

The limits for the coupling torque of RF-connectors, recommended by the connector manufacturers must be obeyed.

Any previous datasheet issues have now become invalid.

